



# PRODUCT SPECIFICATION

## 1. Revision History

Date	Rev. No	Page	Summary
2022-10-08	Rev1.0	All	1'st issued

## 2. Scope

This document is the specification of 14 Inch Flat MONITOR for application of Multi-sync. This monitor is a High quality FHD TFT-LCD display solution for industrial display device having RoHS conformity.

## 3. Features

- Supports up to 1280x 398, 60Hz
- On Screen Display (OSD)
- 8-bit(6bit+FRC) Color depth, display 16.7M colors
- HDMI DP VGA for Panel interface

## 4. Electrical Specification

### 4.1 Input Power

4.1.1 Input power is required as

Voltage : Monitor - DC IN 12[V] / 3.00[A]

LED - DC 12[V] / 1.50[A]

Consumption: Monitor 15[W]Max

LED - 15 [W] Max

### 4.2 Input Signal

4.2.1 DP Port input: V1.2

HDMI Port input: V2.0



## 4.3 Mode & Timing

### 4.3.1 Supply Video Timing Chart (VESA)

■ : Native Mode


Resolution	Refresh Rate	H Frequency	Main Frequency	Remark
<b>1280 x 398</b>	60 Hz	44.697Khz	74.375Mhz	VESA

## 5. LCD Panel Specifications

### 5.1 Screen Specification

Item	Specification	Unit	Remark	Note
Display Area	337.92(H) x 105.14 (V)	mm		
Driver Element	a-Si TFT active matrix	Dot		
Display Colors	16.7M (8bit )	Color		
Number of Pixel	1280x398	Pixel		
Pixel Arrangement	RGB Vertical Stripe			
Pixel Pitch	0.264(H) x 0.264 (W)	mm		
Viewing Angle	85/85/85/85 (U/D/L/R)	Degrees	CR≥10	①
Weight	TBD	g	Max.	
Contrast Ratio	Typ = 1200:1		Center of Screen	② ④ ⑤
Response Time	On/Off = 30 ms		Typ.	③
White Luminance	TYP = 550cd/m <sup>2</sup>	cd/m <sup>2</sup>	Center of Screen	④ ⑤
Brightness Uniformity	Min = 70 %	%		⑥

© Vendor Name: AUO

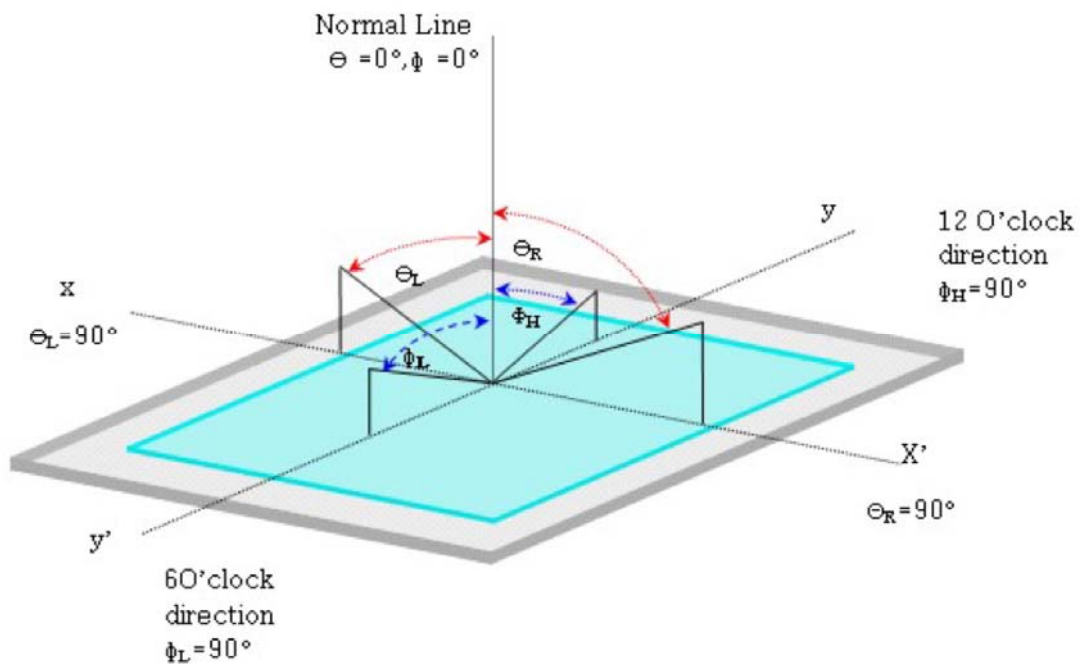


① Viewing Angle

Hor.	$\theta_L$	CR $\geq$ 10 (at center of screen)	Right	85	Degree
	$\theta_R$		Left	85	
Ver.	$\phi_H$		Up	85	
	$\phi_L$		Down	85	

② Contrast Ratio (CR): Ratio of gray max. (G max.), gray min. (G min.) at the center point of panel.

$$CR = \frac{\text{Luminance of all pixels White}}{\text{Luminance of all pixels black}}$$

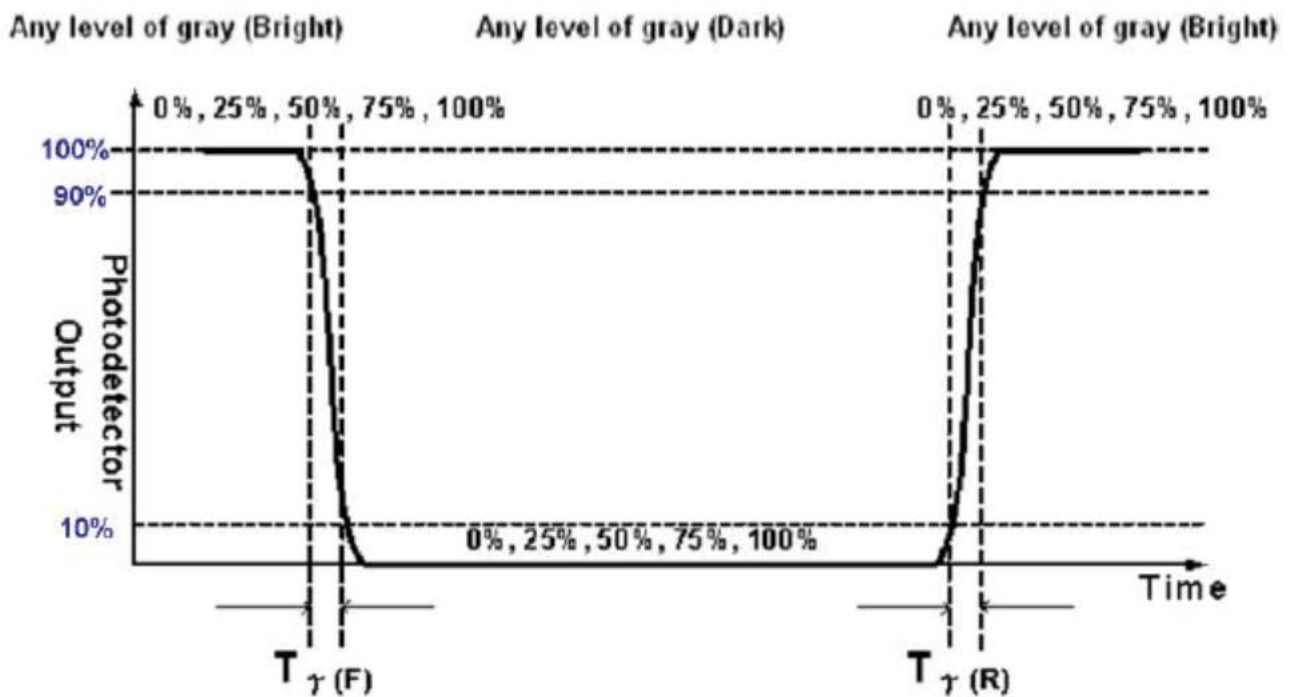

③ Response Time: Sum of TR, TF


④ Luminance of White (Center of Screen)

⑤ Optical characteristics measurement

### 5.2 Test Equipment Setup

After stabilizing and leaving the panel alone at a given temperature for 30 min, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room 30min after lighting the back-light. This should be measured in the center of screen.

A single lamp current: 6.5[mA] Environment condition:  $T_a = 25 \pm 2 [^{\circ}\text{C}]$

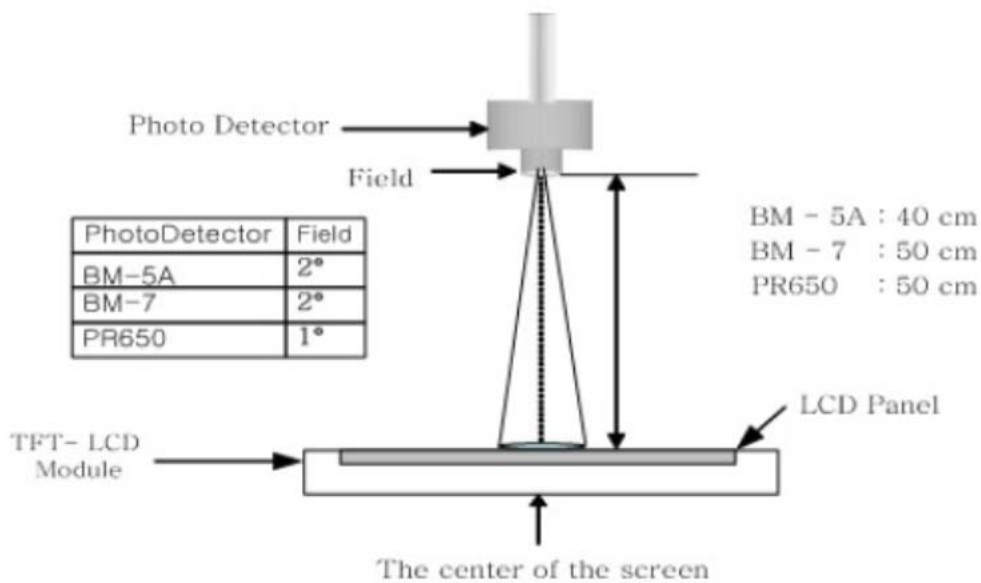


⑥ Brightness uniformity (9 points)

$$B_{uni} = 100 \cdot (B_{max} - B_{min}) / B_{max}$$

$B_{max}$  : Maximum brightness,  $B_{min}$  : Minimum brightness

Definition of test point

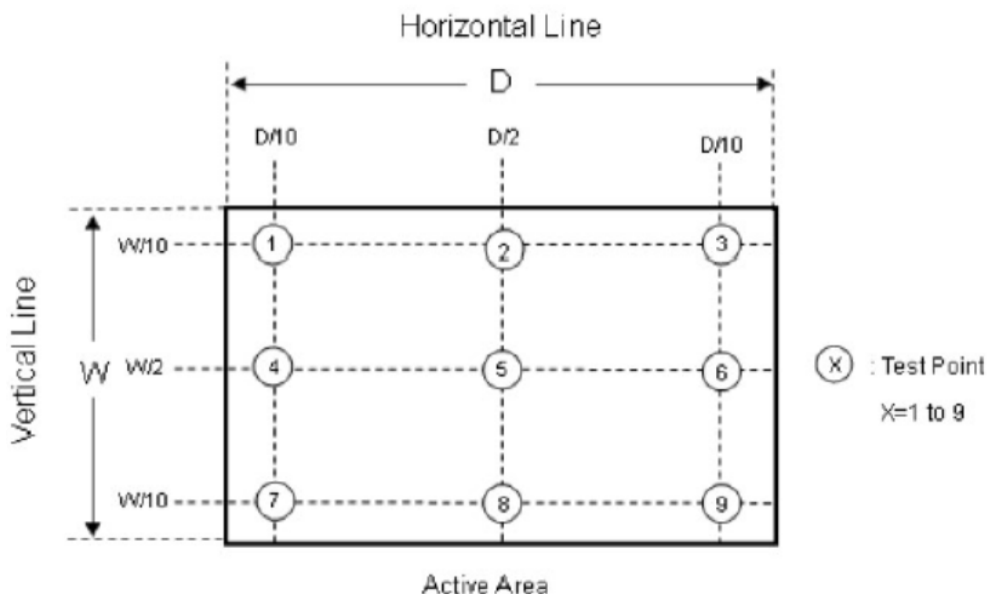

### 5.3 .Back Light Unit

The Back-light system is an edge-lighting type with LEDs (Light Emitting Diode)

ITEM	MIN	TYP	MAX
INPUT VOLTAGE	-	12V	-
INPUT CURRENT	-	3A	-
OUTPUT VOLTAGE	-		27V
OUTPUT CURRENT (CH max)	-	400mA	-
OUTPUT CURRENT (CH min)	-		
OUTPUT POWER	-		15W
BLU ON SIGNAL	3.3V		5V
BLU OFF SIGNAL	0V		0.5V
A-DIM SIGNAL	1.4V		5.0V

### 5.4 CIE Coordinates (Color Chromaticity)

Item	Color chromaticity (CIE 1931)	
	X(Typ.)	Y(Typ.)
White	0.313 ± 0.03	0.329 ± 0.03


## 5.5 Absolute Maximum Rating

### 5.5.1 Absolute rating of environment

ITEM	Symbol	Min	Max	Unit	Note
Storage temperature	T <sub>STG</sub>	-20	60	°C	(1)
Operating temperature (Surface of Glass temperature)	T <sub>OPR</sub>	0	40	°C	(1)
Shock (non - operation)	S <sub>NOP</sub>	-	30	G	(2),(4)
Vibration (non - operating)	V <sub>NOP</sub>	-	1	G	(3),(4)

\*Note

- (1) Temperature and relative humidity range are shown in the figure below, 90% RH Max.(40 °C ≥ Ta)
- (2) 2ms, half sine wave, one time for ±X, ±Y, ±Z axis.
- (3) 10-300Hz, Sweep rate 10min, 30min for X, Y, Z axis.
- (4) At testing Vibration and Shock, the fixture in holding the Module to be tested have to be hard and rigid enough so that the Module would not be twisted or bent by the fixture.

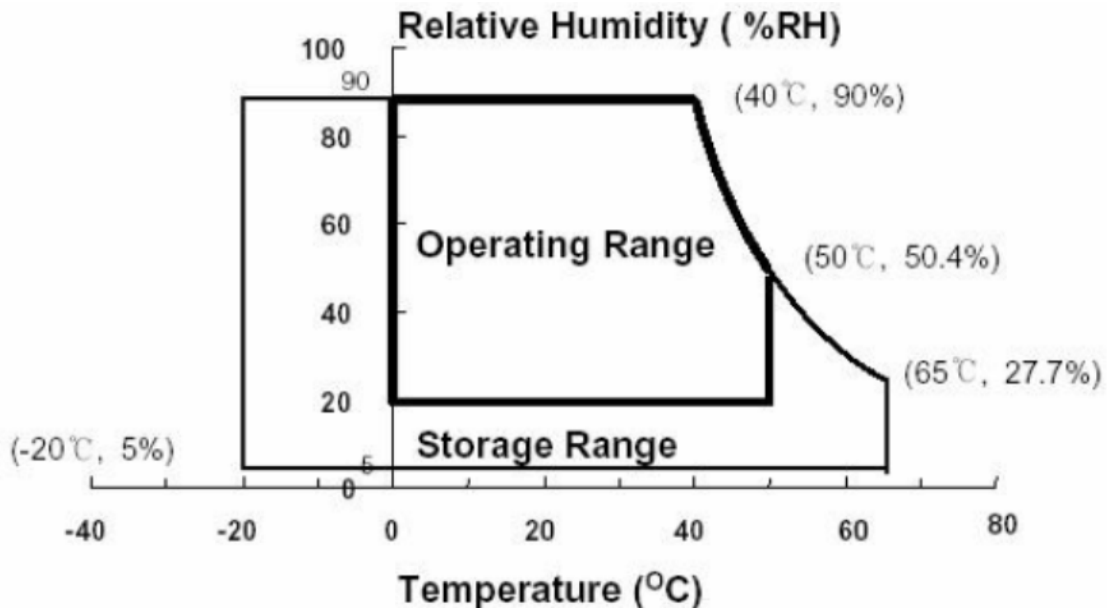

## 6. Visual Specification

### 6.1 Standard Mode & Display Size

Item	Specification	Note
Standard Mode	1280* 398 @ 60 [Hz]Resolution	Recommend Mode
Display Size	339.72(H) x 105.14(V)	Panel Active Visual Size

### 6.2 Standard Condition


Item	Specification	Note
Warm up Time	30 minutes after lighting	
Panel Face	None	
AC / DC Adapter	12V DC IN	

### 6.3 Screen image Stabilizing Time

Item	Specification	Note
Video Display Time	After turning power switch on, within 15 seconds	
Display Stability time	After turning power switch on, within 30 seconds	
AC input Voltage Stability	All specifications should be within 10% at 100~240V.	
Environments stability	All specifications should be within 2% at the operating temperature	

Note) All kinds of specification should be satisfied after 30 minutes from turning power switch on.

### 6.4 H & V Centering : 1280 × 398, 60Hz

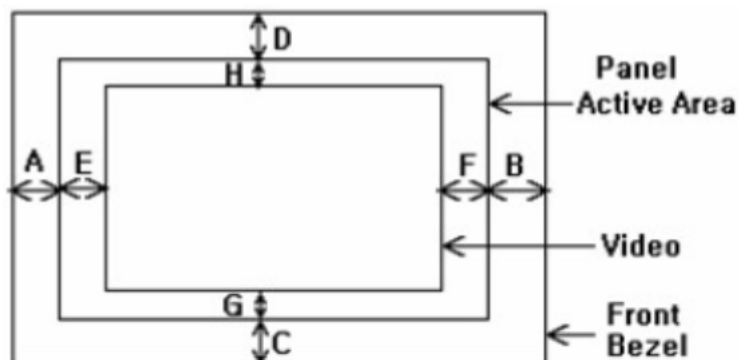

$$|A-B| \text{ and } |C-D| \leq 1.0[\text{mm}], |E-F| \text{ and } |G-H| \leq 1.0[\text{mm}]$$



## **6.5 Focus**

Focus shall be inspected by using both normal H-character pattern and reversed one, after adjusting the brightness to 80 steps and contrast to 80 steps by the OSD. The intersection between black and white character s should be clearly visible at all the points on the screen, and the focus performance shall be evaluated from a viewing distance of 50cm

## **6.6 Color Spread**

The color must not spread on the panel, especially on the 4 side that panel and bezel contact each other.

## **6.7 Noise, Jitter, Color lack, Screen shrink, and etc.**

During the operations, there should not be a noise, jitter, color lack, screen shrink, etc. on the screen.

## **6.8 Residual Image**

After 10 hours' aging at the same pattern, video pattern will be changed for the residual image inspection. The image sticking should disappear after 2 hours have passed.

## **6.9 Crosstalk**


Crosstalk shall be investigated visually by a white box pattern. Any cross-talk effect must not be seen on the white area.

## 7. A/D Board

This board is main controller board and has following functions.

- Scaling: input signal to fit Panel's resolution.
- Converter Power control.
- DC to DC conversion to supply various power to each circuit


### 7.1 A/D Board Connectors

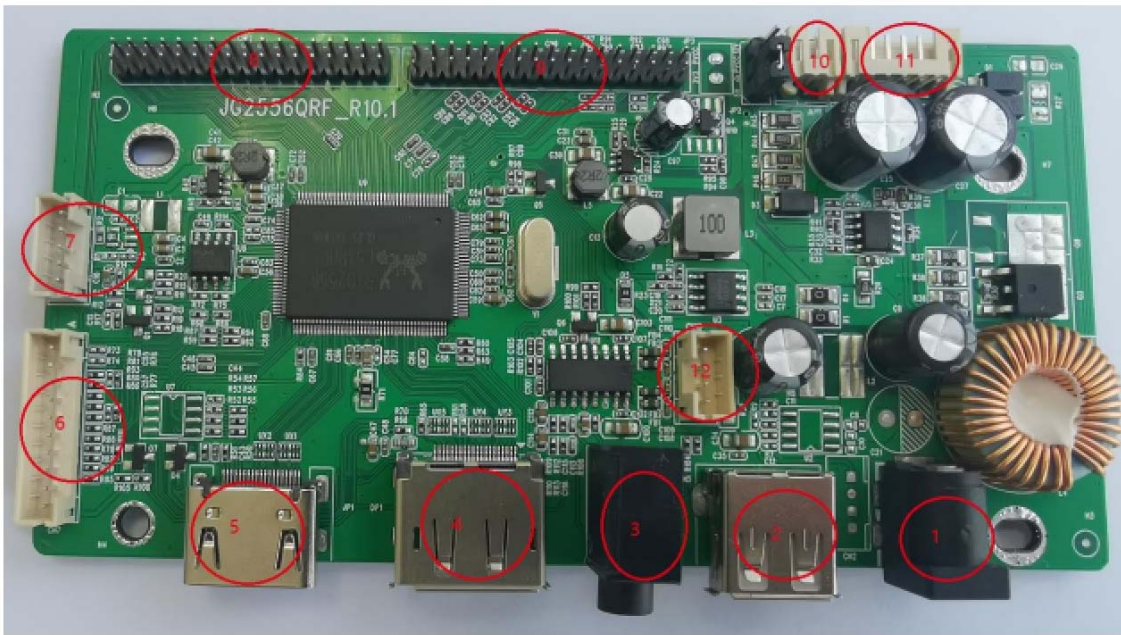

### 7.2 A/D Board connection


Symbol	Description	Parts Number	Manufacture
CN7	OSD KEY	-	
CN2	LVDS	-	
CN9	LVDS	-	
CN1	DC 12V 2.0		
DP1	DP		
JP1	HDMI		

### 7.3 OSD Key

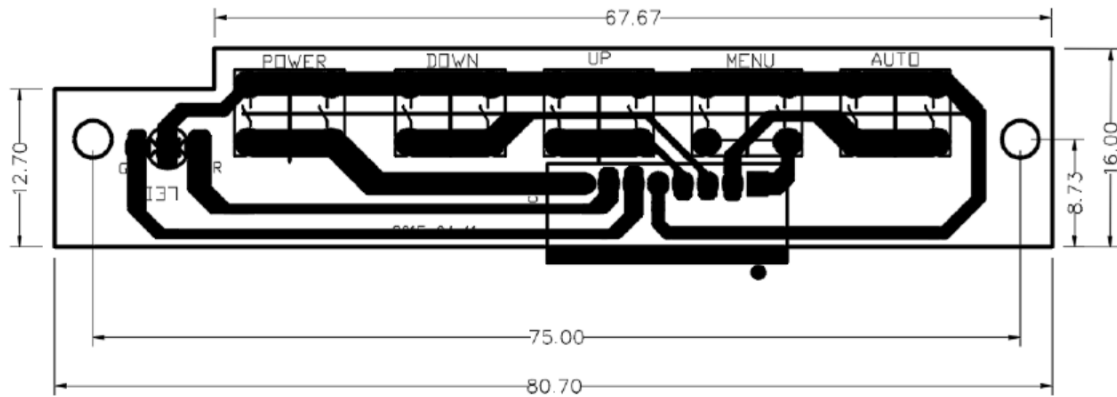

- MENU Key** : Use this key into the menu OSD.
- AUTO key** : To select the items in the OSD panel.
- UP/DOWN key** : To adjust the items in the menu OSD
- Power Indicator** : It shows monitor is on when green


### 7.4 OSD Menu Structure

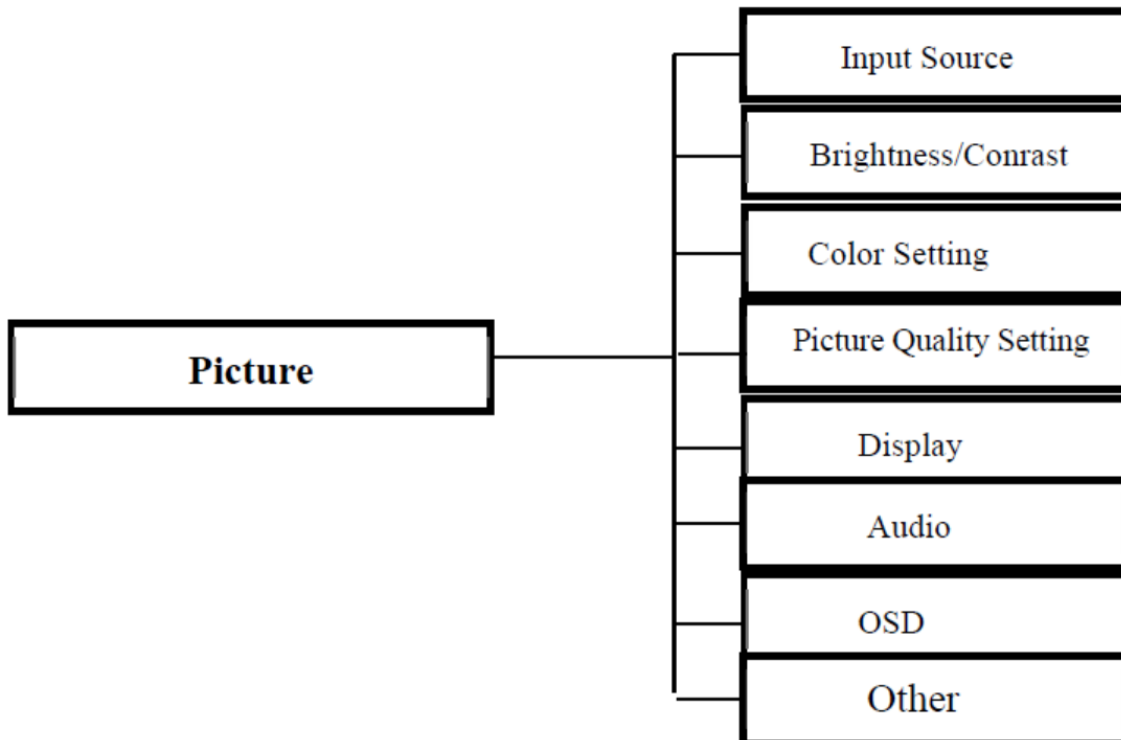

## 8. Touch Controller

### 8.1 Dimension

Parameter	Value	Remark
Width	72 mm	
Height	28 mm	

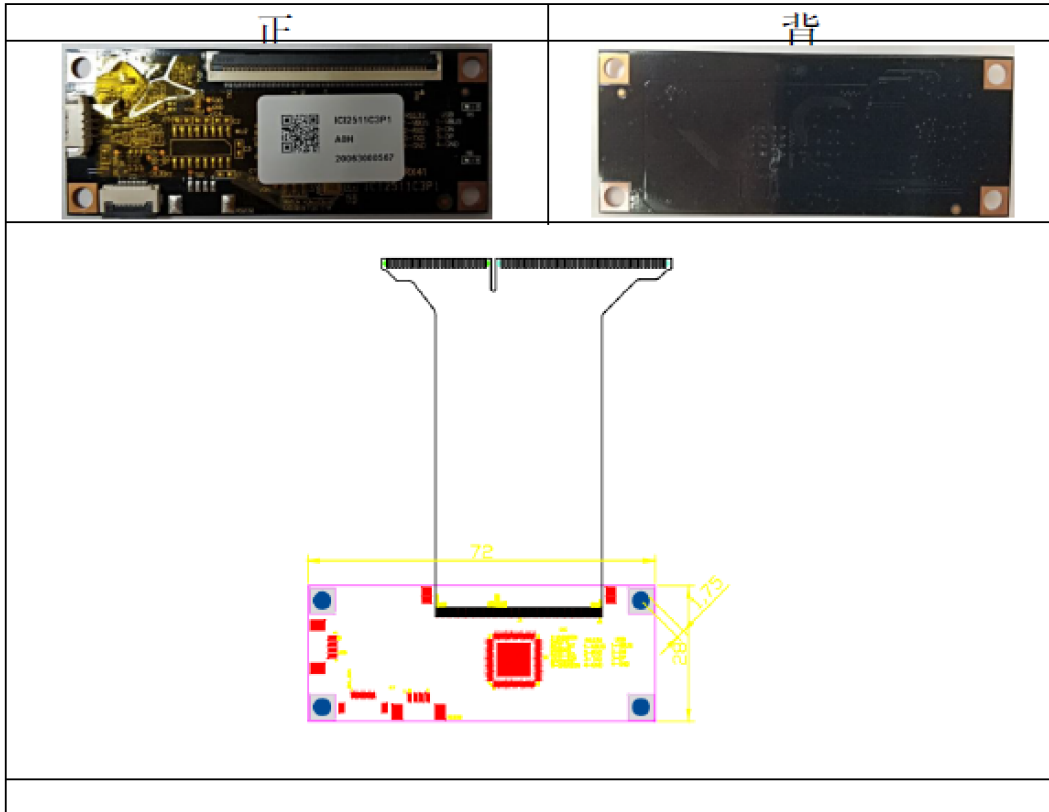

### 8.2 Touch Controller IC

- ILI2511

### 8.3 Touch CONNECTOR

- USB



4-Pin, Pin Pitch=1.25mm, Part Number: MOLEX/53261-0419										
Pin	1	2	3	4						
Name	USB5V	DN	DP	GNDIN						

